

MGP6(6进6出 多功能旋转接头/滑环)

订购型号说明

MGP61-ID12-VC

MGP6:紧凑型多功能旋转接头


2: 2进2出

1: 接口尺寸, 1=G1/8", 2=G1/4", 3=G3/8"
4=G1/2", 5=G5/8", 6=G3/4", 8=G1", 10=G(1+1/4")

产品等级代号
VC 通用级产品等级
VD 工业级产品等级
默认省略=VC通用级产品等级

ID12: 内孔12mm

MGP6 (多功能旋转接头) 尺寸图

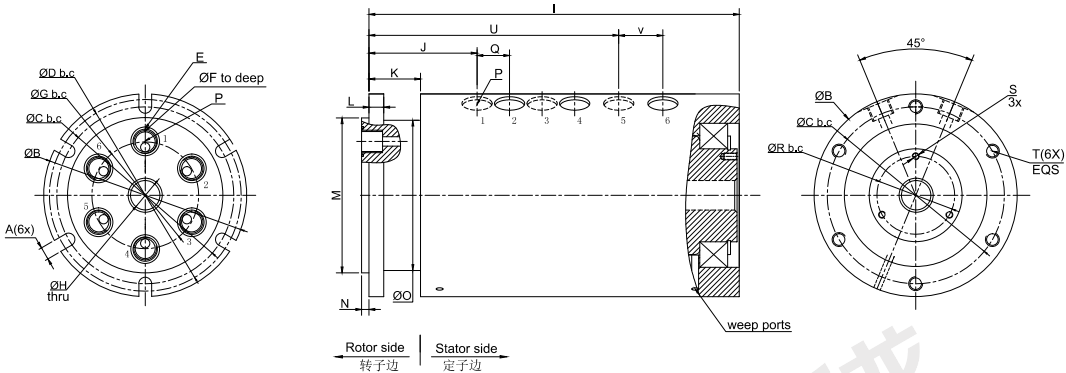

选型表

MGP6系列选型表									
型号	通道数	接口尺寸	内孔尺寸	压力范围	型号	通道数	接口尺寸	内孔尺寸	压力范围
MGP61-ID12	6进6出	G1/8"	12mm	0-50MPa	MGP64	6进6出	G1/2"	N/A	0-50MPa
MGP62-ID19	6进6出	G1/4"	19mm	0-50MPa	MGP65	6进6出	G5/8"	N/A	0-50MPa
MGP63-ID19	6进6出	G3/8"	19mm	0-50MPa					

Size	MGP61-ID12	MGP62-ID19	MGP63-ID19	MGP64	MGP65
A	7.14mm	9mm	9mm	9.0mm	11.0mm
B	80.95mm	101.60mm	107.95mm	125.4mm	163.50mm
C	66.68mm	85.73mm	92.08mm	104.78mm	142.88mm
D	76.20mm	92.08mm	100.00mm	117.48mm	152.40mm
E	2-015 O-Ring [14.00mm]	2-017 O-Ring [17.17mm]	2-019 O-Ring [20.35mm]	2-023 O-Ring [26.70mm]	2-026 O-Ring [31.47mm]
F	4.0mm	6.4mm	9.53mm	12.7mm	19.05mm
G	39.67mm	33.32mm	53.98mm	61.90mm	79.38mm
H	12.7mm	19.05mm	19.05mm	N/A	19.05
I	164.7mm	207.6mm	227.7mm	261.8mm	336.1mm
J	61.9mm	70.4mm	72.0mm	81.5mm	90.5mm
K	30.1mm	33.3mm	33.3mm	42.8mm	44.5mm
L	7.92mm	7.92mm	7.92mm	11.10mm	12.70mm
M	60.33mm	73.03mm	82.55mm	96.825mm	120.65mm
N	3.18mm	3.18mm	3.18mm	4.75mm	4.75mm
O	55.6mm	69.9mm	72.2mm	94.5mm	114.3mm
P	G1/8"	G1/4"	G3/8"	G1/2"	G3/4"
Q	14mm	17.5mm	20.60mm	24.56mm	37.72mm
R	18.5	34.9	34.9	N/A	34.90mm
S	M3x0.5	M5x0.8	M5x0.8	N/A	M5x0.8
T	M6x1.0	M8x1.25	M8x1.25	M8x1.25	M10x1.25
U	N/A	146.0mm	159.9mm	185.3mm	N/A
V	N/A	23.06mm	23.16mm	30.12mm	N/A